


PROFISHARK 1G

ALL-IN-ONE GIGABIT ETHERNET TROUBLESHOOTER

THE ULTIMATE SOLUTION FOR FIELD TESTING & MONITORING

The ProfiShark 1G is the perfect tool for the field engineer as well as for long-term traffic collection. As an all-in-one network TAP in a pocket-sized box, this portable device gives you all the flexibility and ease of use you require for network monitoring.

The only additional hardware required is a PC with a free USB 3.0 port. As it is based on USB 3.0 (5 Gbit/s), the ProfiShark 1G manages full-duplex Gigabit at wirespeed.

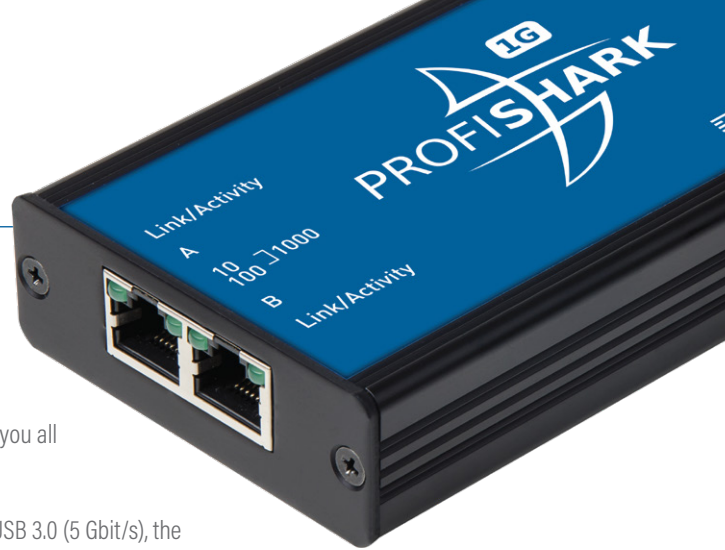

FEATURES

- 10/100/1G monitoring on USB 3.0
- USB 3.0 powered
- Non-intrusive, fail-safe monitoring
- Hardware aggregation
- SPAN and In-Line modes
- 8 ns hardware timestamp
- Real time statistics
- Low level error and bandwidth monitoring
- Direct capture to disk
- Invisible to the network
- PoE compliant
- Full-duplex GbE (2 Gbit/s) capture, filtering, timestamping, and aggregation at wirespeed
- Compatible with all software packet analyzers

LONG-TERM TRAFFIC CAPTURE

The long-term capture feature is designed to help you catch intermittent problems in the act. By connecting a NAS to the ProfiShark, captures can be done for long periods of time. Included in ProfiShark software package.

- Full-duplex 1G (2 Gbit/s) wirespeed capture
- Ringbuffer or normal capture mode
- Split capture to different files, based on time or size
- Compatible with all Intel- and ARM-based Synology NAS systems

Your Distributor:

Brandt-Data GmbH

Friedrich-Hayn-Str. 4
24582 Bordesholm / Germany
Tel.: +49-4322-699 657
Fax: +49-4322-699 658
info@brandt-data.de
www.brandt-data.de

TECHNICAL SPECIFICATIONS

CONNECTORS	ACCESSORIES
2 x RJ45 8 pins 1 x USB 3.0 1 x 5 VDC optional input	1.8 m USB 3.0 cable RJ45 cable Pouch USB key
DIMENSIONS (WxDxH)	MAX. NETWORK LATENCY
69 x 124 x 24 mm 2.72 x 4.88 x 0.94 in	1 Gbps: 370 ns — 100 Mbps: 660 ns — 10 Mbps: 6600 ns
WEIGHT	SYSTEM REQUIREMENTS
176 g — 0.39 lb	Dual Core Processor — 4 GB memory — USB 3.0 port
COMPLIANCE	LEDS
RoHS — CE	2 x Speed/Status — 2 x Link/Activity — 1 x Power
SUPPORTED OS	
Windows 7 / 8 / 10 (32-bit & 64-bit) — Linux — macOS	

ORDER REFERENCE

C1AP-1G



V4.6-0718